



360 Star Flash Pattern List

Pattern References

There are two, easily recognizable flash patterns in this list to look for as reference points when configuring the 360 Star.

#1 – Running Lights Only – This pattern illuminates only the amber dome lights.


#34 – All On Steady with Running Lights – This pattern illuminates all lights in a steady-on pattern.

Steady-On Patterns

“Steady-On” flash patterns (numbers 17 through 34 listed below) are to be used only in conjunction with a positive switched 12-volt flasher such as the 911EP® LED Commander 212.

The “Steady-On” flash patterns turn on for six seconds then turn off for three seconds. This is to reduce heat buildup and prevent unnecessary wear on the L.E.D.s. This will not interfere with operations using a 12-volt flasher.

<u>Pattern Number and Name</u>	<u>Factory Defaults</u>	<u>Pattern Number and Name</u>
1. Running Lights Only	Green wire	35. Rotator, 65 rpm, 2
2. Rotator, then 10 Quick Bursts	Blue wire	36. 35. + Running lights
3. 64 Flash	Blue and Green wires	37. Rotator, 75 rpm, 2
4. Chicago, Adjacent Segments	Yellow wire	38. 37. + Running lights
5. Triple Flash – Fast	Yellow and Green wire	39. Rotator, 85 rpm, 2
6. Triple Flash – Slow	Yellow and Blue wires	40. 39. + Running lights
7. Wig-Wag 3+ Hz		41. Rotator, 1, changes speed
8. 7. + Running lights		42. 41. + Running lights
9. Wig-wag 1 Hz	Green, Blue and Yellow wire	43. Rotator, 2, changes speed
10. 9. + Running lights		44. 43. + Running lights
11. Rotator, 75 rpm, 1		45. Squab
12. 11. + Running lights		46. 45. + Running lights
13. Rotator, 120 rpm, 1		47. Chicago, Non-Adjacent Segments
14. 13. + Running lights		48. 47. + Running lights
15. Rotator, 175 rpm, 1		49. On/Off at 3.2 Hz
16. 15. + Running lights		50. 49. + Running lights
17. Steady-On – Zones 1 & 2		51. On/Off at 1 Hz
18. 17. + Running lights		52. 51. Running lights
19. Steady-On – Zones 2 & 3		
20. 19. + Running lights		
21. Steady-On – Zones 3 & 4		
22. 21. + Running lights		
23. Steady-On – Zones 4 & 1		
24. 23. + Running lights		
25. Steady-On – Zones 1, 2 & 3		
26. 25. + Running lights		
27. Steady-On – Zones 2, 3 & 4		
28. 27. + Running lights		
29. Steady-On – Zones 3, 4 & 1		
30. 29. + Running lights		
31. Steady-On – Zones 4, 1 & 2		
32. 31. + Running lights		
33. Steady-On – All Zones		
34. 33. + Running lights		

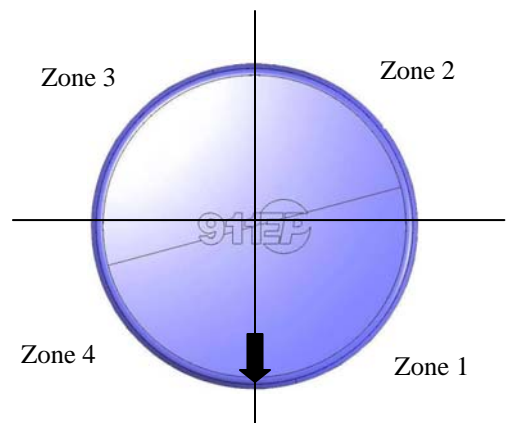

Note: Reference arrow on bottom of 360 Star indicates front.